opaz

002-4716



INSTRUCTION MANUAL

BEJA PULL-DOWN KITCHEN FAUCET

Dear Customer,

Thank you for purchasing this product. To ensure best possible performance, please READ, FOLLOW, AND KEEP THESE INSTRUCTIONS.

MAINTENANCE

Faucets are crafted with skill and quality to last a lifetime. By following the instructions in this booklet, you will enjoy this quality item for years to come. To clean, wipe gently with a soft damp cloth then wipe dry. Faucet finishes are very durable. However, to ensure a long-lasting luster, harsh abrasives or polishes should be avoided.

SAFETY TIPS

- Please read and understand this entire manual before attempting to assemble, operate or install the product.
- Turn off the water before loosening any connections or disassembling the faucet.
- Cover the drain to avoid losing parts.
- When working underneath a sink, or cutting or soldering water supply lines, protect your eyes by wearing safety glasses.

IMPORTANT: Most problems can be fixed by tightening a nut connection or replacing a washer. Check the supply line connections for any leaks and tighten if necessary. Don't overtighten any supply line connections.

CAUTION

If you solder the joints during installation, the seats, cartridges, and washers must be removed before using a flame, or the warranty will be voided on these parts.

PREPARATION

Before beginning assembly of product, make sure all the parts are present. Compare the parts with the package and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

WARRANTY


Thank you for purchasing this faucet. These products have been made to demanding, high-quality standards and are 12 months guaranteed for domestic use against manufacturing faults. This warranty does not affect your statutory rights.


The faucet is guaranteed if used for normal trade purposes and is valid for the original buyer only. Any warranty is deemed invalid if the faucet has been improperly used or subject to neglect. The product is recommended for residential and non-commercial use. No warranty applies to commercial use. Tactical Distribution is not responsible for any costs related to labour, injuries or any other loss incurred during the product installation, repair or replacement, including any indirect or consequential damages. Due to continuous product improvement, we reserve the right to change the product specifications without prior notice.


IMPORTED BY: Tactical Distribution | 1501 Ampère Street, Boucherville (Québec), Canada | J4B 5Z5

opaz

002-4716

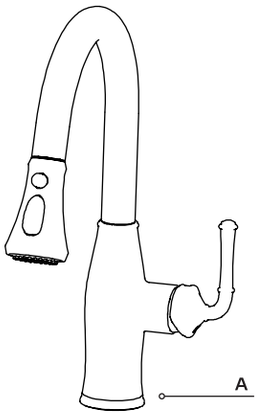

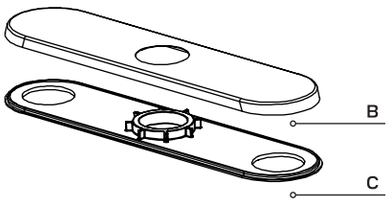



INSTALLING YOUR NEW FAUCET

STEP 1 Shut off hot and cold water supply under sink. Remove the old faucet.

STEP 2 Remove the quick-connect nut, rubber washer, and metal washer from the faucet.

STEP 3 Place the base plate (C) and the panel (B) in the mounting hole of the sink to align the center holes of bottom plate (C) and panel (B) with sink center mounting hole. Carefully thread the inlet pipe (3.1) and shank (3.2) through the mounting holes of panel (B), base plate (C) and the sink, until the faucet is located on top of the panel (B).

STEP 4 Install the rubber washer (2.3), the metal washer (2.2) and the quick-connect nut (2.1) to the shank (3.3) under the sink. Tighten the quick-connect nut (2.1). Secure the faucet on the counter.

STEP 5 Loosen the cover of the counterweight (D) and pull it to the retract tube (5.1) to a proper position. Tighten the counterweight block (D) to make it fixed on the retract tube (5.1), and then push the drawing tube (5.1) into the quick-connection hole (5.2).

STEP 6 Connect both ends of the water inlet pipe to the hot shutdown valve and cold valve, and tighten it with a wrench, not too tight.

FAUCET PARTS		
NO	**DESCRIPTION**	**QUANTITY**
A	Faucet	1
B	Panel	1
C	Bottom plate	1
D	Counterweight	1

